

Stocked & Ready To Go!

We now hold Corflute® in stock suitable for corflute signs, material protection and creative project applications.

No wait. No bulk order delays. Just the Corflute® you need ready when you are!

Technical Information:

Material: 100% recyclable Australian made polypropylene

Printability: Corona surface treatment applied to enable ink adhesion. Ideal for screen and digital printing


Wettability: Unaffected by water. Ideal for outdoor signage

UV stabilised: For outdoor applications

Service temperature: Retains integrity between minus 20 degrees C to 85 degrees C

Size:

2440mm x 1220mm x 4mm

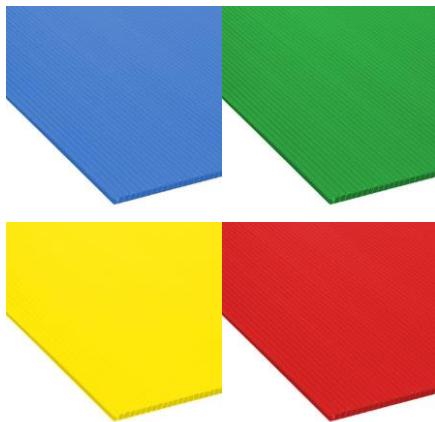

Corex Plastics (Australia) Pty. Ltd.

261 Frankston Dandenong Road, Dandenong 3175 AUSTRALIA
Phone: +61 3 9238 1300 | Email: hello@corex.com.au

* All information is to the best of our knowledge, true and correct. However, as many factors outside our knowledge and control can effect the products, no warranty can be given or implied in respect of such information and no information should be construed as a warranty in relation to the product or its use.



Colours:

- [White Corflute®](#)
- [Black Corflute®](#)
- [Grey Corflute®](#)
- [Green Corflute®](#)
- [Yellow Corflute®](#)
- [Blue Corflute®](#)
- [Red Corflute®](#)
- [Natural/Clear Corflute®](#)

Minimum Order:

-Pre-packed in ream packs of 10 sheets (per colour).
-MOQ – 1 pack / 10 sheets

Australian Made & Recyclable:

We manufacture our own Corflute® right here on site in Victoria. We invite all of the products you purchase from us for recycling and reuse at end of life.



PRODUCT INFORMATION

Contact Us:

hello@corex.com.au



Find out more
corex.com.au

PRODUCT INFORMATION

MATERIAL PROPERTIES	UNIT	VALUE	TEST METHOD
Mechanical & Physical Properties			
Specific Gravity	g/cc	0.91-0.925	ASTM D792
Tensile Strength @ Yield	MPa	25	ASTM D638
Flexural modulus	GPa	1.1	ASTM D790
Elongation @ break	%	≥700	ASTM D638
Izod Impact	J/m	134	ASTM D256
Izod Impact @ 23° Celsius	KJ/m2	14	ISO 180/1
Izod Impact @ 0° Celsius	KJ/m2	6.5	ISO 180/1
Izod Impact @ -23° Celsius	KJ/m2	4	ISO 180/1
Drop Dart Impact	Kg cm/mm	50	Nylex TM4
Heat deflection temp @ 1.82 MPa	°C	50	ASTM D648
Hardness	Shore D	68	ASTM D2240
Linear coefficient of thermal expansion	mm/mm/°C	10-15x10 ⁻⁵	ASTM D696
Mould Shrinkage	%	1-2	ASTM D955

GENERAL INFORMATION			
Standard Gauge (mm)	4mm	Standard Sheet Size (mm)	2440mm x 1220mm
Finish	Corona treated	Printable	Yes
Colour	Standard colours	U.V. Treatment	Yes
Service Temp	-20°C to +95°C	Warranty	Tested to 3-year outdoor weathering. Excluding natural colour, up to 1 year.